

The Invisible Systems Wireless Transmitters have one pulse input, multiple Wireless Transmitters (in remote locations to each other) can be connected to separate meters and send their messages individually.

Features

- Wireless communication
- A variety of available radio frequency options
- Battery powered
- Small footprint
- Wireless, range of up to 15km line of sight
- Up to 10 year battery life
- 2m flying lead

Optional Features


- 1 analogue sensor (4-20mA, 0-1vdc, 0-5vdc, 0-10vdc)
- Temp probe
- 1 status inputs (can be programmed to normally open or

Technical Information

Available Configuration

- | | |
|----------|------------|
| • MHz | 868 |
| • Power | 100mW |
| • Inputs | 1 |
| • Range | Up to 15km |

Dimensions

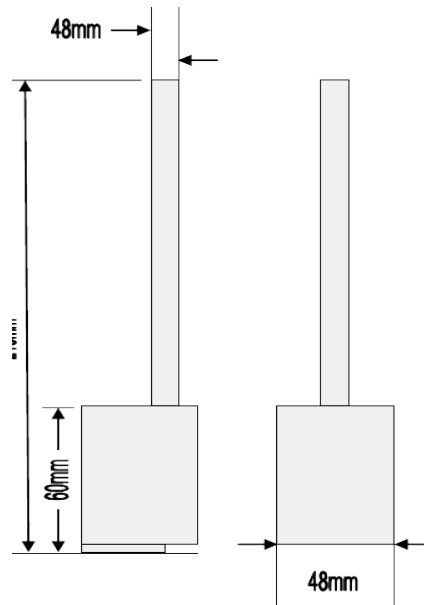

Wiring Instructions

Signal Cable

Black – GND Common

White – Pulse Input 1

Fitting

- The Case is water resistant but should not be immersed in water
- Mounting bracket has adhesive tape with peel off strip cable tie slot
- 2 counter sunk holes for screw fixing if required
- ABS case for ease of cleaning and food grade plastic

System Components

Part no.

868MHz Radio Transmitter dual pulse input

3999- 913-2056-A

Radio extenders (boosters) are also available to extend range, the radio extender requires permanent power (230v AC). Monitoring bracket supplied.

www.invisible-systems.com

T +44 (0)1539 722520 email info@invisible-systems.com
7 - 9 Beetham Road, Milnthorpe, Cumbria LA7 7QL

invisible systems
DELIVERING INFORMATION

