

Ultra RF Alarm Display

The alarm display works with the range of ULTRA RF temperature transmitters and Realtime Online. It enables users of the monitoring system be alerted to temperature exceptions with an amber flashing light in the event of a warning and red light and audible noise in the event of an alarm, the display shows the location and temperature information. The unit must be factory programmed with the system information and has the option to be connected to an external audible beacon.

Note the unit must be connected to an ULTRA RF gateway and Realtime Online.



Product Details

Options

- ✓ Range of RF temp transmitters
- ✓ Audible Beacon

Features


- ✓ Warning of temp exceptions
- ✓ Audible, visual alarm
- ✓ Realtime-Online™ integrated
- ✓ Security office positioning

Applications

- ✓ Food Manufacturers
- ✓ Healthcare, medical
- ✓ Pharmaceutical
- ✓ Industry



How it works

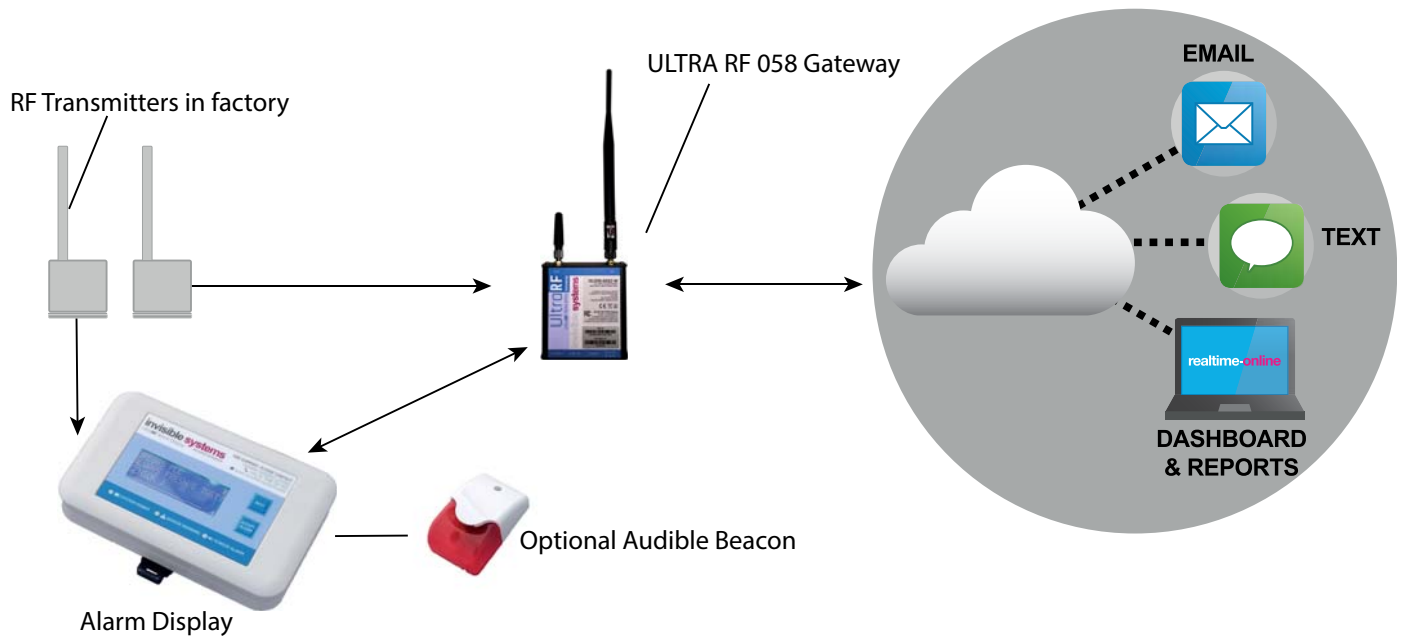

Region	Part Number	Supply Voltage	RF
EUROPE	3999-913-2191	230V AC	EUR 868Mhz
AUSTRALIA	2999-913-2191	230V AC	AUS 915Mhz
USA	1999-913-2191	110V AC	USA 915Mhz