

## Mobile Compliance Monitor


The mobile compliance monitor works with the range of ULTRA RF temperature transmitters. It enables distribution companies that have a need to monitor temperatures of their goods in transit to have peace of mind by the driver being able to view temperatures wirelessly and be alerted to alarms in the event of exceptions.

The system comprises of wireless RF temperature transmitters, in various forms, that communicate to a receiver in the drivers area, that in turn sends data to any Android mobile device via Bluetooth. In the event of an exception the Android device displays the temperatures as in alarm, both visually and audibly, thus enabling corrective action to avoid stock loss.

Data can be downloaded from the mobile device for traceability.

Options:

- Wide range of RF temperature transmitters
- Android mobile display with dashboard mounts
- Cellular GPS gateway with Realtime Online web reporting, alerts and GPS tracking (coming soon)

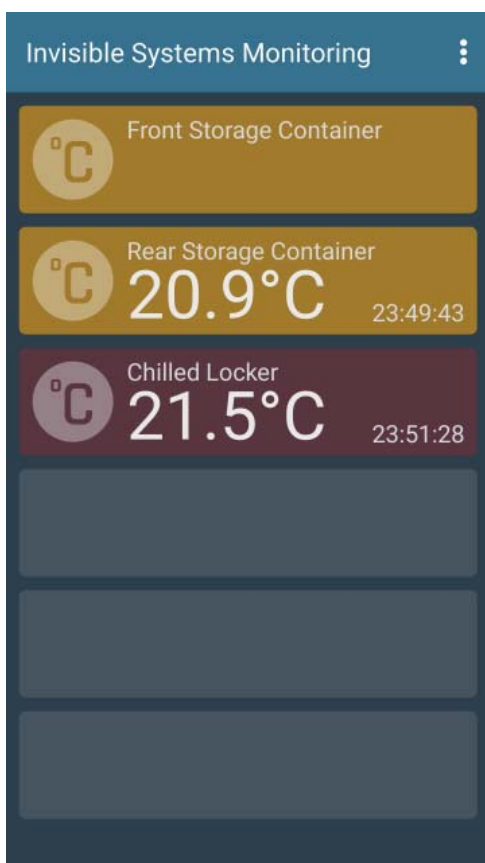

## Product Details

### Features


- ✓ Temperature logging for traceability
- ✓ Early warning of temperature exception
- ✓ Optional Realtime-Online™ integration
- ✓ Wireless, simple installation

### Applications

### Distribution

- ✓ Refrigerated, frozen, ambient
- ✓ Livestock
- ✓ Pharmaceutical
- ✓ Blood/organ transportation

## How it works

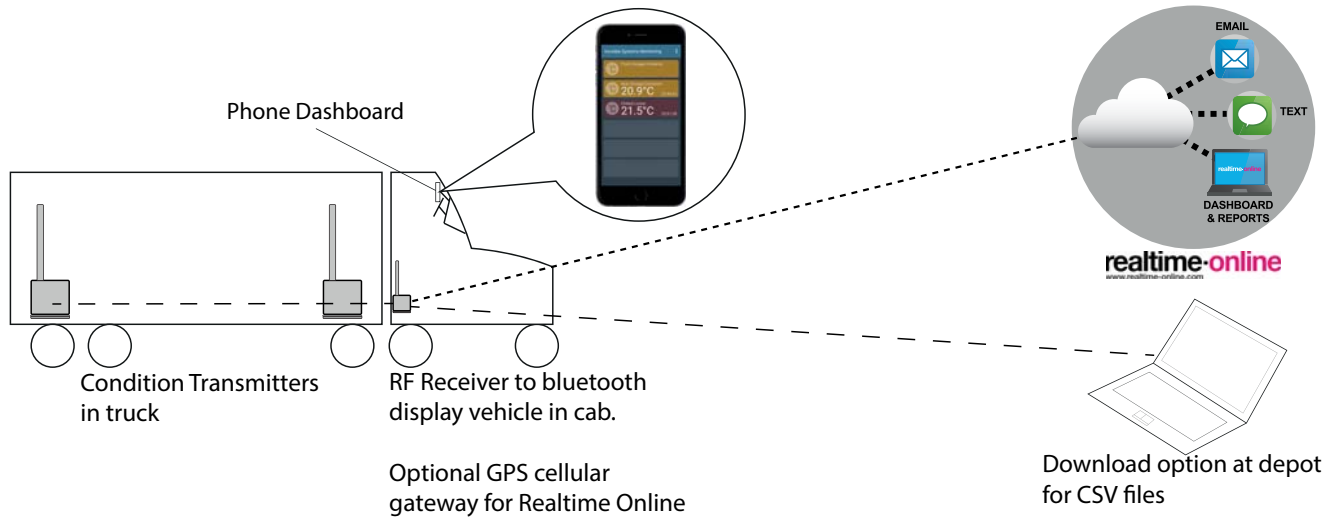

|               |           |            |
|---------------|-----------|------------|
| 3999-913-2191 | 12/24V DC | EUR 868Mhz |
|---------------|-----------|------------|

|               |   |
|---------------|---|
| 3999-913-2205 | Boxed Temperature c/w external antenna                              |
| 3999-913-2206 | Boxed Temp and Humidity c/w external antenna                        |
| 3999-913-2007 | Boxed Temp, Humidity and CO2 c/w external antenna                   |
| 3999-913-2103 | Temp Tx-Sensor (-55C/+85C) on 2m Flat PVC cable                     |
| 3999-913-2186 | Temp Tx Sensor (-55C/+85C) on 2m PVC c/w mag switch                 |
| 3999-913-2156 | Temp Tx Sensor Indoor Ambient with Radiation Tube                   |
| 3999-913-2231 | Tx-ULTRA RF-Temp Tx-Sensor (-25C/+85 C) on 2m PVC c/w pointed probe |
| TBC           | 12 - 24V DC Vehicle Gateway with GPS                                |